


RLM/D

Downlight



Ability to use spotlights that can be directed and angled as semi-recessed fixtures provides both decorative and practical benefits. Litpa combines all optical and technical features of track spotlights with the decorativeness of semi-recessed systems in RLM/D fixtures.

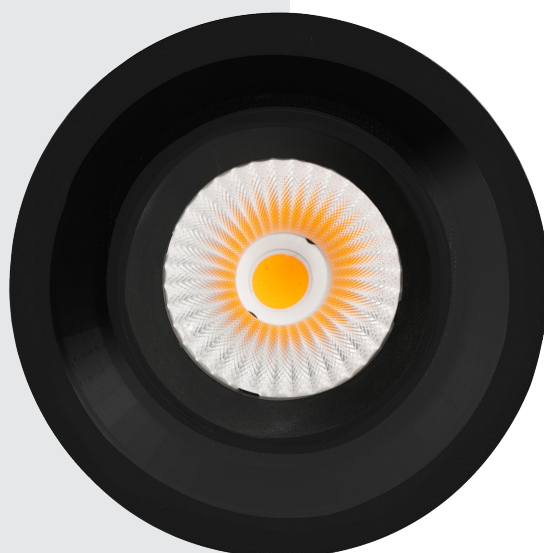

RAL COLORS

Std.	9005
Opt.	9016
	9006

RLM/D

IP20

Code	Beam Angle	Luminous Flux	System Power	Weight
RLM/D10 NB	15°	1.180 lm	10 W	0.60 Kg
RLM/D10 MB	40°	1.115 lm	10 W	0.60 Kg
RLM/D10 WB	60°	1.130 lm	10 W	0.60 Kg
RLM/D20 NB	15°	2.090 lm	20 W	0.60 Kg
RLM/D20 MB	40°	1.970 lm	20 W	0.60 Kg
RLM/D20 WB	60°	2.005 lm	20 W	0.60 Kg
RLM/D30 NB	15°	2.995 lm	30 W	0.60 Kg
RLM/D30 MB	40°	2.825 lm	30 W	0.60 Kg
RLM/D30 WB	60°	2.880 lm	30 W	0.60 Kg

Body: Aluminum Injection
Driver: Included


Reflector: PC
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY



Honeycomb Louvre



BOX DIMENSIONS
27x18x17 cm

BOX WEIGHT
0.80 Kg

