



Enex



Description

Maintained and non maintained direction indicating emergency light. Single sided screen. Manufactured in self-extinguishing and fire retardant polycarbonate according to CEI-21, CEI 60598-2-22 The latest generation of sealed and rechargeable Ni-Cd batteries for high temperature
Supply: 230V, 50 Hz
Duration: 1-3 h

Code

Enex 18
Enex 28
Enex Exit (Left Side Arrow)
Enex Exit (Right Side Arrow)
Enex Exit (Down Arrow)

Lamp

1x8W L
2x8W L
1x8W L
1x8W L
1x8W L

Color

White
White
White
White
White

Box Dimensions

Inside box 1 PCS.
Enex 135x370x95 mm
Enex Exit 135x370x95 mm

Weight

Inside box 1 PCS.
Enex 18 1.150 gr
Enex 28 1.300 gr
Enex Exit 1.150 gr


Protection: IP65



Enex Exit



Dimensions

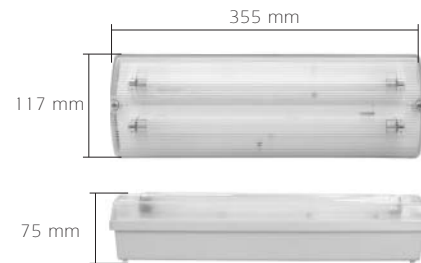

PLX



Description

Maintained direction emergency. Single or double sided
Body: Made of extruded aluminum with plastic end caps
3.6V NiCd
Duration: 3h

Code

PLX (Left Side Arrow)
PLX (Right Side Arrow)
PLX (Downward Arrow)

Lamp

9xGreen Led
9xGreen Led
9xGreen Led

Color

Gray
Gray
Gray

Box Dimensions

Inside box 1 PCS.
PLX 320x240x70mm

Weight

PLX 1.000 gr.

Protection: IP20



Dimensions

