


Office Lighting


FNSB-Y

IP20
IP40 Optional

FNSB-Y series designed in the form of circle to be driven into the ceiling allows soft and diffuse lighting applications and the LED technology used ensures energy-saving substantially. Ensures practical solutions thanks to its compliance with different types of suspended ceilings as well as different power ranges.

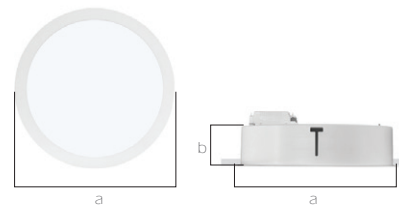

Code	a	b	Cut-Out
FNSB-Y 25	250 mm	82 mm	Ø 237 mm
FNSB-Y 35	350 mm	82 mm	Ø 327 mm
FNSB-Y 55	550 mm	82 mm	Ø 527 mm



Code	FNSB-Y 25	FNSB-Y 35	FNSB-Y 55
LED	High Efficiency Mid-Power LED		
System Power	17 W - 24 W	22 W - 30 W	42 W
Light Flux	1,800 lm - 2,530 lm	1,650 lm - 3,160 lm	3,510 lm
Colour Temperature	3000 - 4000 - 5000 K		
Voltage	220V - 50Hz		
Body	0.8 mm thick DKP sheet steel		
Diffuser	1,2mm opal		
Cooler	Cooling from the body surface		
Frame	1.5 mm thick DKP sheet steel		
Colour	White		
Box Dimensions	27x27x10 cm	37x37x10 cm	57x57x10 cm
Weight	1.950 gr	3.100 gr	6.550 gr